

# Instruction Manual

## Rechargeable warn light

702,000,002



- |                             |      |
|-----------------------------|------|
| 1 - Rotate                  | 7 h  |
| 2 - Quad Flash              | 7 h  |
| 3 - Single Blink            | 50 h |
| 4 - Alternating Blinks      | 7 h  |
| 5 - SOS Rescue (Morse Code) | 12 h |
| 6 - Steady on - high        | 4 h  |
| 7 - Steady on - low         | 30 h |
| 8 - 2 LED Flashlight        | 7 h  |
| 9 - 4 LED Flashlight        | 5 h  |
| 10 - Off                    |      |



9.6 W 16 LED  
7500 mcd



10 m  
IP67



## IK20 T



40 m



-36°C - 116°C



100-240 V~  
50/60 Hz  
5 V  1.0 A




# Led Warning Light

## (One By One Rechargeable Type)

### IMPORTANT SAFEGUARDS

- Read all instructions before operating
- Do not look directly at the light; may cause injury to your eyes
- Turn off all lights before charging
- Do not use alcohol, flammable solutions, or other solvents on or near this unit. Only clean with warm water and a soft cloth.
- Administer close supervision when using around children
- Waterproof only when used in accordance with manufacturer's instructions

### PARTS IDENTIFICATION

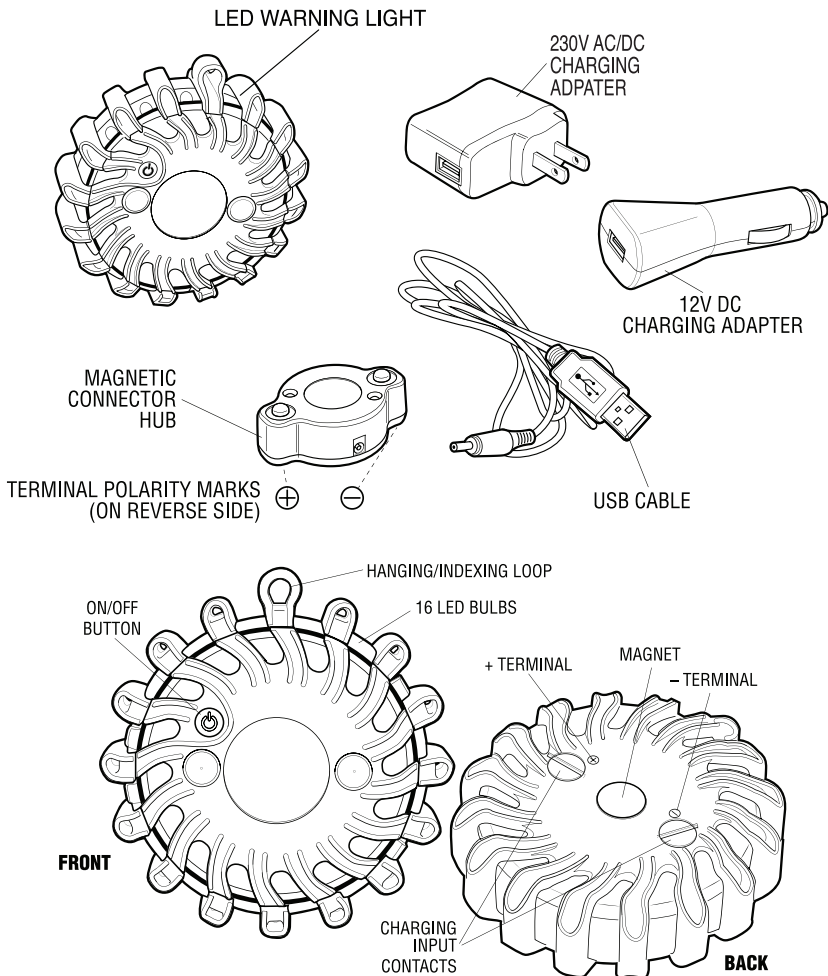

## CHARGING

The Flare may be charged using either a 12V car charger or 230V wall charger (included).

1. Plug the USB PLUG into the appropriate 12V or 230V CHARGING ADAPTER, depending on your application.
2. Plug the male end of the USB CABLE into the female port of the MAGNETIC CONNECTOR HUB.
3. Connect the MAGNETIC CONNECTOR HUB to the FLARE aligning the (+) and (-) terminal symbols on each. The MAGNET in the center will keep the two items connected.
4. Plug the 12V or 230V CHARGING ADAPTER into either a 12V power receptacle or 230V wall outlet.
  - Green LED = charge in process
  - Red LED = fully charged OR the Flare and Hub are misaligned and need to be adjusted

## OPERATION

Press the ON/OFF BUTTON to rotate through the following 9 light patterns:

POWER DURATION	RUN TIME
The battery will be fully charged with either charger within 2-3 hours. When fully charged you may expect these run times*:	
#1 - Rotate	7 hours
#2 - Quad Flash	7 hours
#3 - Single Blink	50 hours
#4 - Alternating Blinks	7 hours
#5 - SOS Rescue (Morse Code)	12 hours
#6 - Steady on - high	4 hours
#7 - Steady on - low	30 hours
#8 - 2 LED Flashlight	7 hours
#9 - 4 LED Flashlight	5 hours

### Alternate Operation:

To turn off the flare without cycling through the 9 light pattern, press and hold the ON/OFF BUTTON for 2 seconds. Two LEDs will flash five times and then turn off. When ready to operate again, press the ON/OFF BUTTON and it will return to the last flash pattern that was selected before turning off.

## RANGE OF USE

1. Safer and ecologically better for our environment than flame style emergency road flares. No spark, open flame, fumes or toxic chemicals are produced when using the LED Road Flare.
2. Shock resistant construction makes the Flare very durable and can withstand the impact of roadside traffic. Can even be run over by a truck and still operate. Used by fire, police, and other emergency responders.
3. Lie flat or on its edge depending on your reference. Place on the road, at construction sites, vehicle bumper or other surface, and anywhere needing emergency signaling.
4. The LED Road Flare is waterproof so it may be used for marine applications and safely in wet environments, including submerged to a depth of 10 m. Will float unless secured.
5. Using the magnet on the back, attach to any magnetic metal surface. Place on a vehicle, fence, or other metal surface.

NOTE: It is not recommended that you disassemble the Flare. If it is not reassembled correctly it may result in failure of the waterproof seal and damage to the unit.

## TECHNICAL INFORMATION

SPECIFICATIONS	
INTERNAL RECHARGEABLE BATTERY	Lithium Ion 700 mAh ~ 3.7V 5+ year life
CHARGING SPECIFICATIONS 120V AC/DC CHARGER: (UL Listed)  12V DC CHARGER: (CE)	Input: 100-240V AC, 50-60 Hz 0.15A Output: 5.0 V DC 1000 mAh  Input: 12-24V DC Output: 5.0V 850 mAh
TEMPERATURE RANGE	-32°F TO 240°F (-36°C - 116°C)
DOT & TRAFFIC SAFETY COMPLIANCE	1. U.S. DOT (FMCSA) 49 CFR § 392.25 & 393.95 (g) (prohibits the carrying of any flame-producing flare on any Commercial Motor Vehicle (CMV) transporting explosives; any cargo of flammable liquid or flammable compressed gas, whether loaded or empty; or any CMV using compressed gas as a motor fuel). 2. MUTCD Type A (flashing) and Type C (solid on) 3. NFPA 1901 Standards for Traffic Safety; Section 6.7.3 Miscellaneous Equipment
WEIGHT	283.6 grams.
DIMENSIONS	108mm L x 111mm W x 35mm H



Waste electrical products should not be disposed of together with household waste. Please recycle where designated facilities exists. Check with your local authority or retailer for recycling advice.

- The battery must be removed from the appliance before it is scrapped.
- The appliance must be disconnected from the main power supply when removing the battery.
- The battery must be disposed of safely.

## WARRANTY

We do not take responsibility for any damage caused by misuse or any use that is not in compliance with the safety standards described herein.

## CUSTOMER SERVICES

Contact your local importer of your specialized dealer to obtain address of our service department.

---

FROM DATE OF PURCHASE RECEIPT  
2 YEAR GUARANTEE  
ON MATERIAL OR PRODUCTION DEFECTS

# KRAFTWERK®

FAVORITE TOOLS SINCE 1979

KRAFTWERK Europe AG  
Mettlenbachstrasse 23  
CH-8617 Mönchaltorf  
Switzerland  
Tel. +41-44 949 40 50

KRAFTWERK Sàrl.  
25, rue du Stade  
F – 67870 Bischoffsheim  
France  
Tel. +33-388 48 64 50

[www.kraftwerktools.com](http://www.kraftwerktools.com)